




33 Stakehill Industrial Estate, Middleton, Manchester M24 2RW  
Tel: 0161 655 1020 e-mail: ec.sales@heras.co.uk




THIS DRAWING REMAINS THE COPYRIGHT OF HERAS ENTRANCE CONTROL AND MUST NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION

ISS	REVISION	DATE	PCO No.
A	FIRST ISSUE	23.03.15	-
B	DRAWING BORDER CHANGED FROM GEOQUIP TO HERAS	04.12.17	-

INFORMATION ONLY - NOT FOR CONSTRUCTION/MANUFACTURE

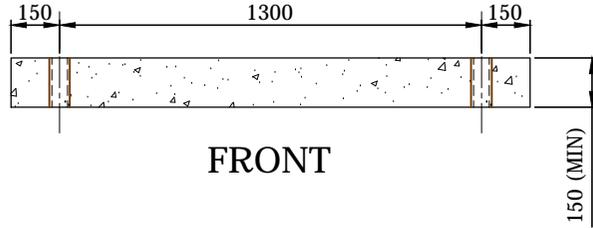


FRONT

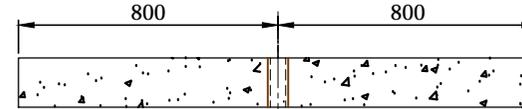

SIDE

**IMPORTANT NOTE:**  
FOUNDATION MUST BE FLAT AND LEVEL TO PREVENT POOLING UNDER EQUIPMENT

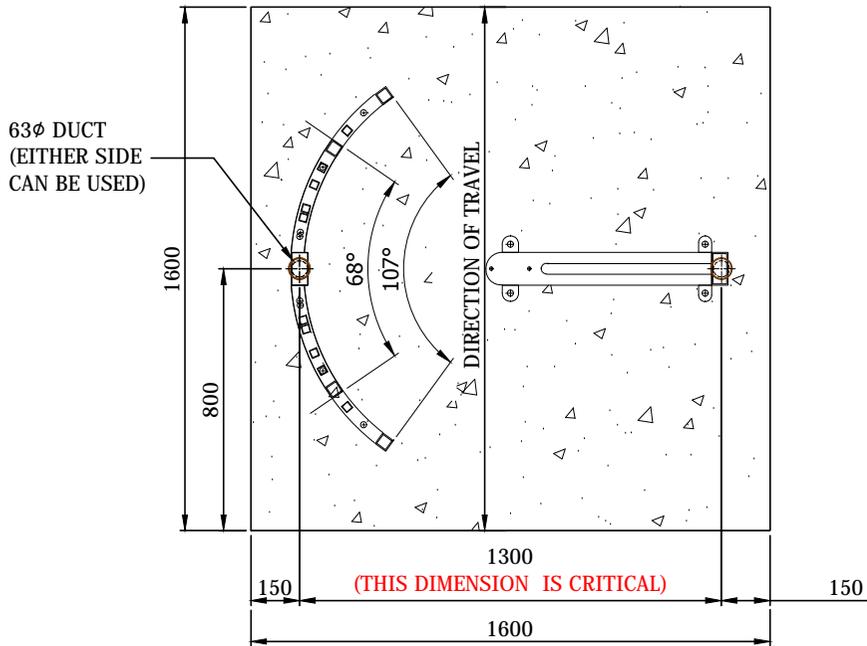

PLAN

**CONCRETE SPECIFICATION**

1. CONCRETE TO BE A DESIGN IN ACCORDANCE WITH B.S.5328.
2. CEMENT TO B.S.12(OP), AGGREGATE TO B.S.882.
3. MAXIMUM SIZE OF AGGREGATE 14mm GRADE C30.
4. MINIMUM CEMENT CONTENT 240kg/m<sup>3</sup>.

**CONCRETE NOTES**

1. ALL CONCRETE THICKNESSES GIVEN ARE A MINIMUM AND MAY BE INCREASED IF REQUIRED TO SUIT SITE CONDITIONS.
2. IT IS NOT NECESSARY TO FIT REBAR REINFORCEMENTS AS THIS MAY CAUSE PROBLEMS WHEN FIXING TURNSTILE.
3. TOP SURFACE MUST BE LEVEL, SUITABLE FOR DRILLING AND FITTING M16 PARABOLTS OR SIMILAR.
4. ALL DUCT DIMENSIONS ARE CRITICAL AND MUST BE MAINTAINED AT ALL TIMES.

FILE COPY

SCALE@A3 <b>1:16</b>	MATERIAL <b>M/S</b>	FINISH <b>PPC</b>	JOB <b>SALES SPECIFICATION</b>	JOB No. <b>700</b>	CLIENT Ref. No. <b>-</b>
DRAWN <i>Ian Lewis</i>	DATE <b>23.03.15</b>	CHECKED <b>-</b>	PROJECT ENGINEER <b>-</b>	TITLE <b>SINGLE TURNSTILE BUILDERSWORK DETAIL</b>	DRG. No. <b>03.1</b>
				ISSUE <b>B</b>	